DOOR SCHEDULE

ITEMS SHOWN FOR FIELD/BLDG. OFFICIALS USE. SEE SPECS FOR PRICE ALLOWANCE.

DOOR NO.	DOOR STATUS NEW	DOOR STATUS EXISTING	SIZE WIDTH	SIZE HEIGHT	SIZE THICKNESS	DOOR TYPE	DOOR MATERIAL	DOOR FINISH	FRAME STATUS NEW	FRAME STATUS EXISTING	FRAME DETAIL HEAD	FRAME DETAIL JAMB	FRAME DETAIL SILL	FRAME TYPE	FRAME MATERIAL	FRAME THICKNESS	FRAME FINISH	HARDWARE ALUM. SADDLE	HARDWARE WEATHERSTRIPPING	HARDWARE CLOSER	HARDWARE PANIC BAR	LABEL DOOR & FRAME 1½ HR. 'B'	LABEL DOOR & FRAME ¾ HR. 'C'	REMARKS
001	●		3'-0"	6'-8"	1¾	D	HM	P	●		1	2	1	HM		P		●	●	●	●			
002	●		3'-0"	7'-0"	1¾	C	WD	P	●		3A	4A	1	HM		P				●				
003	●		3'-0"	7'-0"	1¾	C	WD	S	●		3A	4A	1	HM		P				●				
004	●		3'-0"	7'-0"	1¾	C	WD	S	●		3A	4A	1	HM		P				●				
005	●		(2)3'-0"	7'-0"	1¾	D	WD	S	●		5	4B	1	HM		P				●	●			NOTE 4
006	●		3'-0"	7'-0"	1¾	D	WD	S	●		3A	4A	1	HM		P				●				NOTE 3
007	●		3'-0"	7'-0"	1¾	D	WD	S	●		3A	4A	1	HM		P				●				NOTE 3
008	●		3'-0"	7'-0"	1¾"	D	WD	S	●		G	G	1	HM		P				●				
009	●		3'-0"	7'-0"	1¾"	D	HM	P		●	–	–	–	HM		P		●		●	●			NOTE 1,2
110	●		3'-0"	7'-0"	1¾"	D	HM	P	●		3A	4A	1	HM		P				●			●	NOTE 3
100	●		3'-0"	7'-0"	1¾	B	WD	S	●		3A	4A	1	HM		P				●	●			
101	●		(2)3'-0"	7'-0"	1¾	A	WD	S	●		3B	4B	1	HM		P								
102	●		3'-0"	7'-0"	1¾	C	WD	S	●					HM		P				●			●	NOTE 3
103	●		3'-0"	7'-0"	1¾	C	WD	S	●		3A	4A	1	HM		P		●		●			●	
104	●		3'-0"	7'-0"	1¾	B	HM	P	●		3A	4A	1	HM		P				●	●			NOTE 3
105	●		3'-0"	7'-0"	1¾	A	HM	P	●					AL				●	●	●	●			
106	●		3'-0"	7'-0"	1¾	A	HM	P	●					AL				●	●	●	●			
107	●		3'-0"	7'-0"	1¾	A	HM	P	●					AL				●	●	●	●			
108	●		3'-0"	7'-0"	1¾	A	WD	S		●	–	–		HM		D				●			●	
109	●		3'-0"	7'-0"	1¾	A	WD	S		●	–	–		HM		P				●				

FINISH LEGEND:
P= PAINT
S=STAIN TO MATCH EXISTING; VARNISH
T=TOUCH-UP; CLEAN, PAINT OR VARNISH TO MATCH EXISTING

MATERIAL LEGEND:
HM= HOLLOW METAL
WD=WOOD
AL= ALUMINUM

DOOR NOTES

1. G.C. TO VERIFY EXISTING DOOR SIZE BEFORE ORDERING NEW.
2. EXISTING HOLLOW METAL FRAME TO BE SANDED, PRIMED & PAINTED.
3. G.C. TO VERIFY EXISTING WALL THICKNESS BEFORE ORDERING NEW H.M. FRAME.
4. DOORS TO HAVE ELECTRO-MAGNETIC HOLD OPEN DEVICE.
5. REMOVE ALL EXIST'G GLASS & EXISTING GLASS/FRM DOORS, REPLACE W/ NEW ¼" WIRE GLASS.
6. ALL EXISTING DOORS @ JAN. CLOSETS, & STORAGE IN THE EXISTING BUILDING HAVE A 'B' RATED DOOR. CLOSERS OR LOADED HINGES.

DOOR TYPES

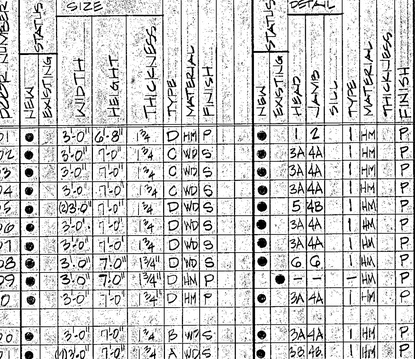



FRAME TYPE

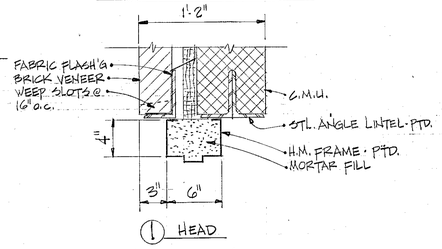

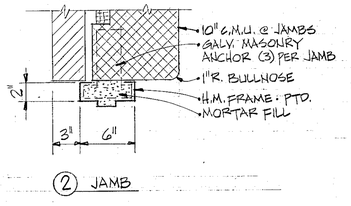





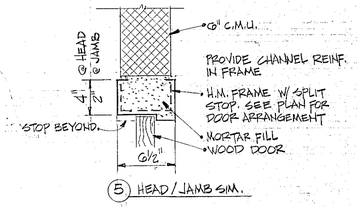



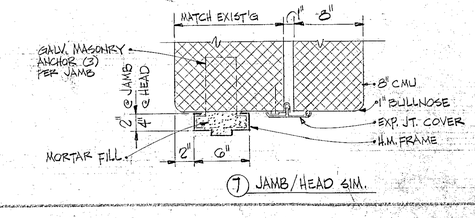

DOOR FRAME DETAILS

SCALE: 1½" = 1'-0"

ROOM FINISH SCHEDULE

ROOM NAME	ROOM NO.	FLOOR CONCRETE	FLOOR CARPET	FLOOR V.C.T.	FLOOR CER. TILE	FLOOR FINISH EXISTING TO REMAIN	FLOOR SEALTITE	WALLS C.M.U.	WALLS BRICK	WALLS GYP. BD. ON MTL. STUDS	WALLS CER. TILE	WALLS FINISH	WALLS PAINT EXISTING	BASE VINYL	BASE CER. TILE	CEILING SUSP. ACOUST.	CEILING EXPOSED STR.	CEILING GYP. BD.	CEILING FINISH	CEILING TO WORK AREA EXISTING	CEILING HEIGHT	REMARKS
4TH CLASSRM	001		●					●				P		●		●			P			
LANG ARTS CLASSRM	002		●					●				P		●		●			P			
4TH CLASSRM	003		●					●				P		●		●			P			
CORRIDOR	004		●					●				P		●		●			P			
LIBRARY	100	●						●				P		●		●			P			
STAIR	101		●					●				P		●		●			P			
W. CLOSET	102		●					●				P		●		●			P			
COMPUTER	104		●					●				P		●		●			P			
CAFETERIA	114		●			●	●	●		●		P	●	●		●	●		P/P	●		NOTE 2
NURSE RM	132		●					●		●		P		●		●			P			
STAIR	103					●	●					P		●								NOTE 1
REMEDIAL MATH	200					●	●	●				P	●	●		●			P			NOTE 2

P. PAINT
E. EPOXY
F. FACTORY

FINISH SCHEDULE NOTES

1. PAINT ENTIRE EXIST'G STAIR, LOWER & UPPER LEVEL
2. REMOVE ALL EXISTING BASE. INSTALL NEW BASE IN ENTIRE ROOM.
3. PAINT GYP. BD. COLUMN ENCLOSURES & SOFFITS - SEE DETAILS
4. PAINT GYP. BD. SOFFITS @ WINDOW HEAD



WINDOW DETAILS

SCALE: 1½" = 1'-0"

STATE PROJECT # 034-89-115-EA

Antinozzi Associates Architects
4021 Main Street
Stratford, Connecticut

DANBURY SCHOOLS REORGANIZATION
CITY OF DANBURY
PARK AVENUE ELEMENTARY
DANBURY CONNECTICUT

DOOR & ROOM FINISH SCHEDULES, WINDOW DETAILS

A5.11

CHECKED BY | SCALE AS NOTED | DATE 7-24-91 | JOB NO. 9012.03