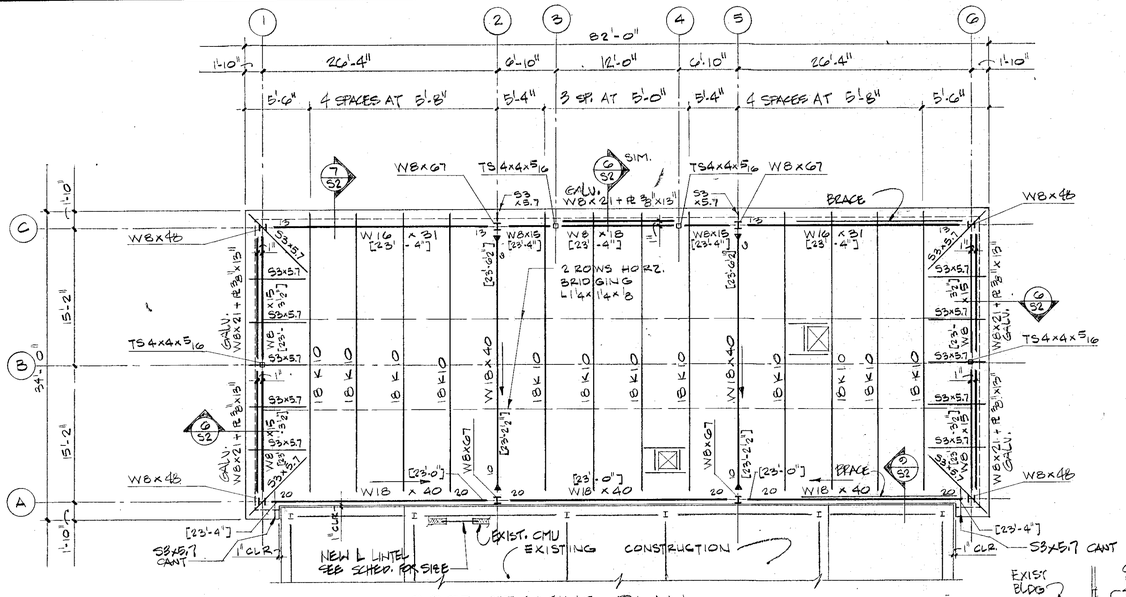

ROOF FRAMING PLAN

1/8" = 1'-0"

1. TOP OF STEEL ELEVATION NOTED THUS [xxx].
2. ROOF DECK SHALL BE 1 1/2" DEEP, 22 GA, PAINTED, WIDE RIB, TYPE 'B' ROOF DECK BY UNITED STEEL DECK, INC.
3. ▶ DETAIL DESIGNATES MOMENT CONNECTION, SEE DETAIL 1/S1
4. SHOP WELD S6x5.7 OUTRIGGERS TO W8 COLUMNS AT LINES "2" AND "5" ALONG LINE "C"

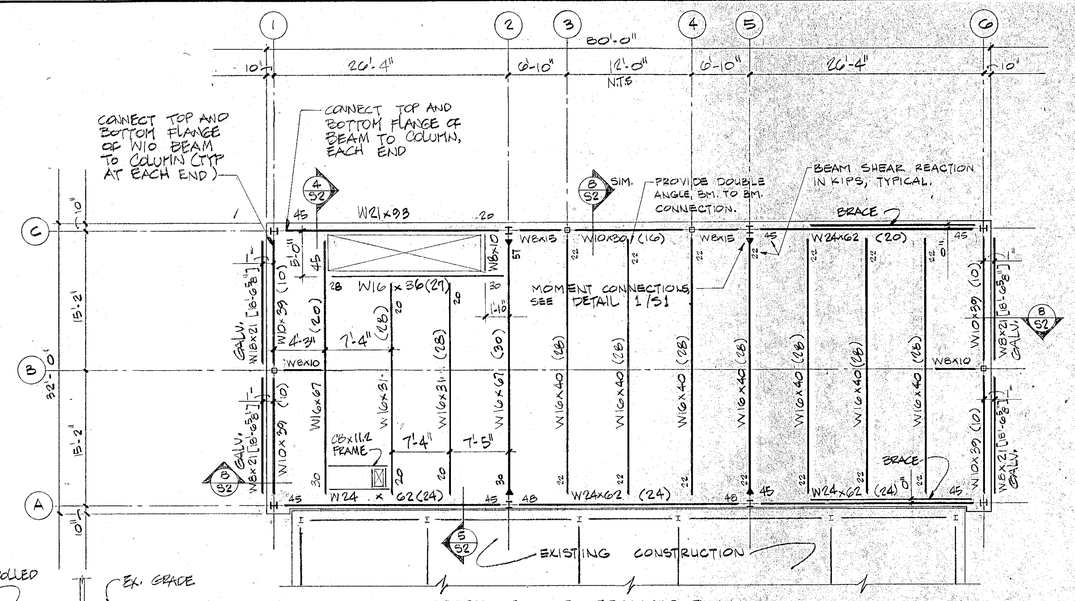

UPPER FLOOR FRAMING PLAN

1/8" = 1'-0"

1. TOP OF STEEL ELEVATION IS 11'-7 1/2" UNLESS NOTED [xxx].
2. THE NUMBER OF 3/4"ϕ x 3 1/2" STEEL STUDS IS NOTED (xxx).
3. FLOOR DECK SHALL BE 2" DEEP, 22 GA., GALV., LOK-FLOOR COMPOSITE FLOOR DECK BY UNITED STEEL DECK, INC.
4. FLOOR SLAB SHALL BE 4 1/2" NORMAL WEIGHT CONC. REINFORCED WITH 6x6-8x8 W.W.M.



SKEMATIC EXCAVATION SECTION

N.T.S.

G.C. TO EXCAVATE EXISTING FILL STARTING AT EXISTING GRADE TO APPROXIMATELY 8'-0" BELOW GRADE OR UNTIL GRAY FINE SAND AND SILT WITH LITTLE FINE TO MEDIUM GRAVEL AND COARSE SAND W/ AN OCCASIONAL COBBLE IS ENCOUNTERED. EXCAVATION SHALL BE BACKFILLED W/ 2" COMPACTED CRUSHED STONE TO BOTTOM OF FOOTING ELEVATION. CONTROLLED FILL SHALL BE USED TO 8" BELOW BOTTOM OF SLAB-ON-GRADE. SEE NOTES FOR ADDITIONAL INFO. EXTENT OF EXCAVATION AND FILL SHALL BE INSPECTED AND APPROVED BY HEPPERY LOGDELL P.E.

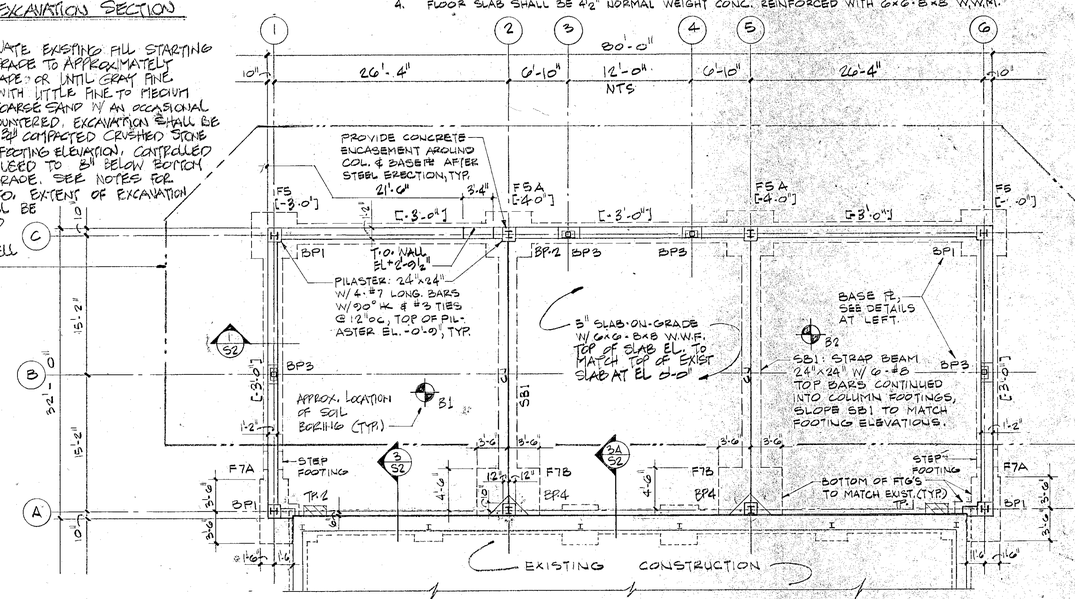

FOUNDATION PLAN

1/8" = 1'-0"

1. BOTTOM OF NEW FOOTING ELEVATION NOTED THUS [xxx].
2. DO NOT UNDERMINE EXISTING FOUNDATIONS.
3. TP# DESIGNATES TEST PIT LOCATION AND NUMBER.
4. SEE ARCH. DWGS FOR CMU WALL LOCATIONS. THICKENED SLAB SHALL BE PROVIDED BENEATH ALL INT. CMU WALLS. SEE DETAIL ON DWG. S1D-2.

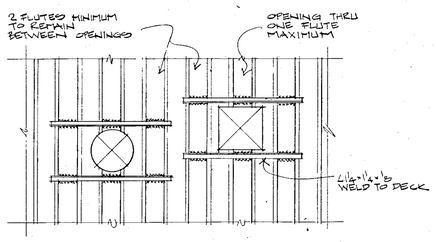

TYPICAL OPENING IN FLOOR DECK



BRACED FRAME ON LINE (A)

1/8" = 1'-0"



BRACED FRAME ON LINE (C)

1/8" = 1'-0"



TYPICAL MOMENT CONNECTION DETAIL (1/S1)

3/4" = 1'-0"



Beam Sizes	No. of Bolts	Load (kips)
W 8,10	2	8.2
W 12,14	3	16.3
W 16	4	26.1

This connection shall not be used where beam reactions indicated on plan exceed the loads indicated above.

Typical Beam To Girder Connection

3/4" = 1'-0"

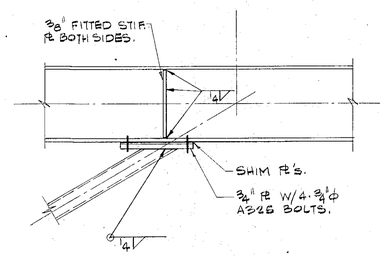

DETAIL (2/S1)

3/4" = 1'-0"



BASE PLATE "BP-4" DETAIL

3/4" = 1'-0"

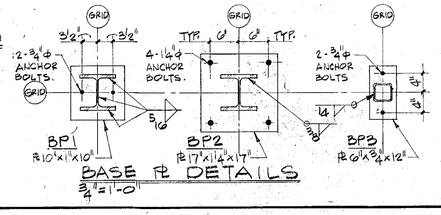

BASE PL DETAILS

3/4" = 1'-0"

FOOTING SCHEDULE				
MARK	SIZE	THK.	REINFORCING LONG WAY / SHORT WAY	REMARKS
F5	5'-0"x5'-0"	14"	7-#6 / 7-#6	-
F7A	3'-0"x7'-0"	24"	5-#7 / 8-#6	MATCH BOTTOM OF EXIST. FTG.
F7B	5'-0"x7'-0"	24"	7-#7 / 9-#6	MATCH BOTTOM OF EXIST. FTG.
F5A	5'-0"x5'-0"	24"	7-#6 / 7-#6	-

DeStefano Associates
Consulting Structural Engineers
50 Thorpe Street
Fairfield, CT 06430
(203) 254-7131

STATE PROJECT #034-89-115-EA

Antinozzi Associates Architects
4021 Main Street
Stratford, Connecticut

DANBURY SCHOOL REORGANIZATION
CITY OF DANBURY
PARK AVENUE ELEMENTARY
DANBURY, CONNECTICUT

FOUNDATION AND FRAMING PLANS.

CLASSROOM/LIBRARY ADDITION

CHECKED BY JBD	SCALE AS NOTED	DATE 24 JULY 89	JOB NO. 90202

S1S-1

Design Products Co. Inc.