

A A15-2 TYP. RAIL & EXISTG STAIRS OF PLATFORMS
SCALE: ½" = 1'-0"

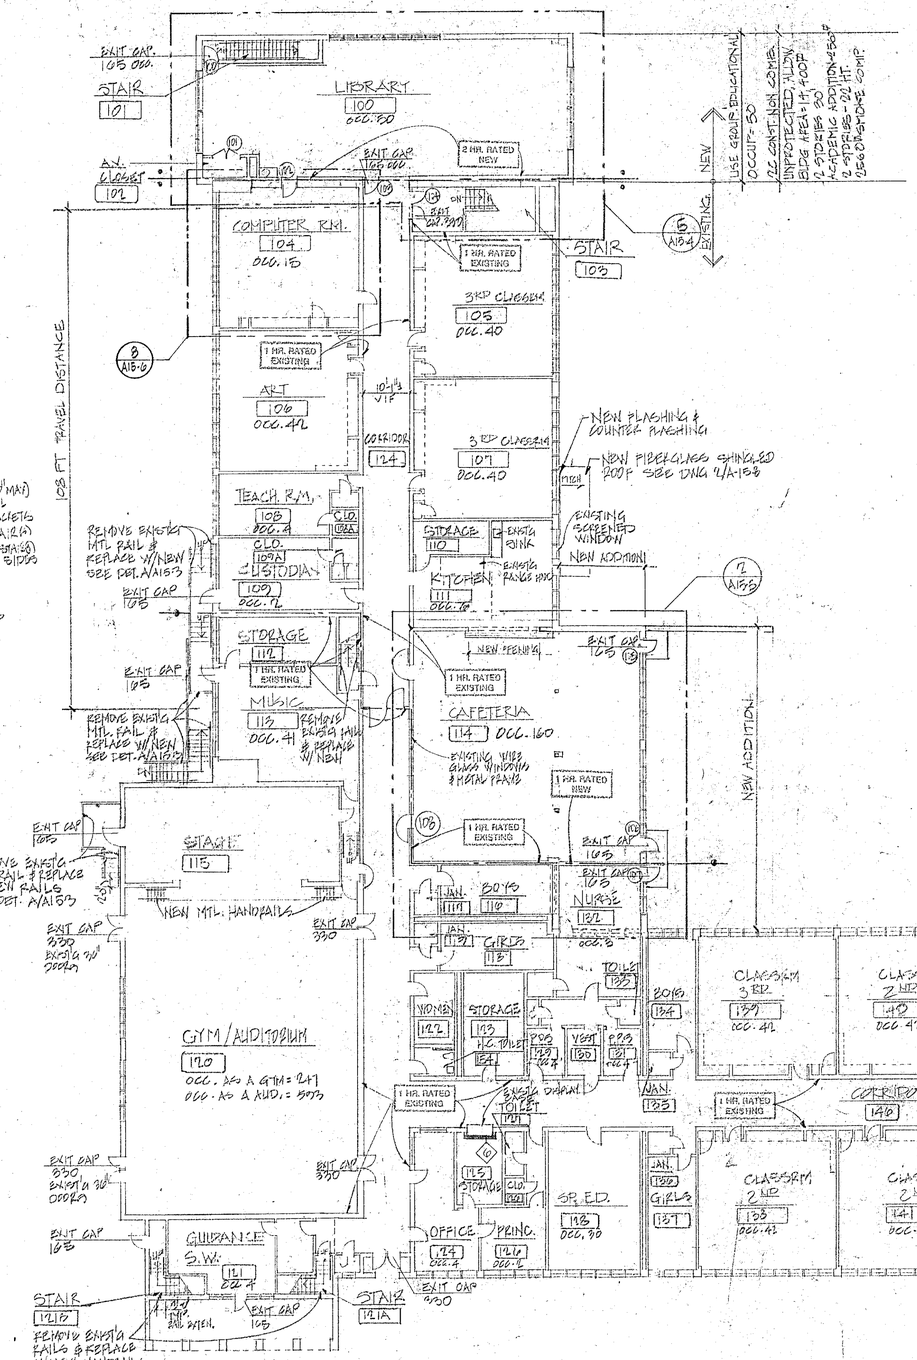



2 A15-3 EXISTING LOFT ABOVE GUIDANCE
SCALE: ½" = 1'-0"

1 A15-3 UPPER LEVEL
1/16" = 1'-0"

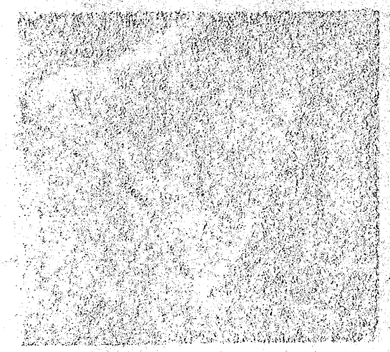

GENERAL INFO.:

1. BUILDING USE GROUP IS E EDUCATIONAL
2. EXISTING BUILDING IS UNSPRINKLERED. ADDITIONS ARE UNSPRINKLERED.
3. OCCUPANT LOADS = 20 SF/OCCUPANT IN CLASSROOMS
   7 SF/OCCUPANT IN ASSEMBLY AREAS. (CONCENTRATED IN AUDITORIUM).
   15 SF/OCCUPANT IN ASSEMBLY AREAS. (NON CONCENTRATED IN CAFETERIA).
   100 SF/OCCUPANT IN OFFICE AREA.
   50 SF/OCCUPANT IN LIBRARY AREA.
4. TRAVEL DISTANCE TO AN EXIT SHALL NOT EXCEED 150'-0" FROM ANY POINT IN THE BUILDING: BUILDING COMPLIES
5. SMOKE DETECTION SYSTEM EXISTS WITHIN EXISTING BUILDING. SMOKE DETECTION SYSTEM IS EXTENDED AND IMPROVED IN THE NEW ADDITIONS
6. TOTAL OCCUPANCY NOT INCLUDING CAFETERIA, GYM/AUD AT UPPER LEVEL = 617
   EXIT EGRESS CAPACITY AT UPPER LEVEL = 1815 (NOT INC. CAFET/GYM)
7. THE FOLLOWING AREAS ARE HANDICAPPED ACCESSIBLE:
   A. MAIN ENTRANCE TO BUILDING
   B. ACCESSIBLE TOILET.
   C. ENTRANCE/EXIT FOR GYM & AUDITORIUM
   D. MAIN OFFICE

LEGEND

- 1 HOUR FIRE SEPARATION WALL
- 2 HOUR FIRE WALL

STATE PROJECT # 034-89-115 EA

Antinozzi Associates Architects
4021 Main Street
Stratford, Connecticut

DANBURY SCHOOLS REORGANIZATION
CITY OF DANBURY
PARK AVENUE ELEMENTARY
DANBURY, CONNECTICUT

FLOOR PLAN
UPPER LEVEL

A5-3

CHECKED BY | SCALE 1/16" = 1'-0" | DATE 7-24-91 | JOB NO. 9201