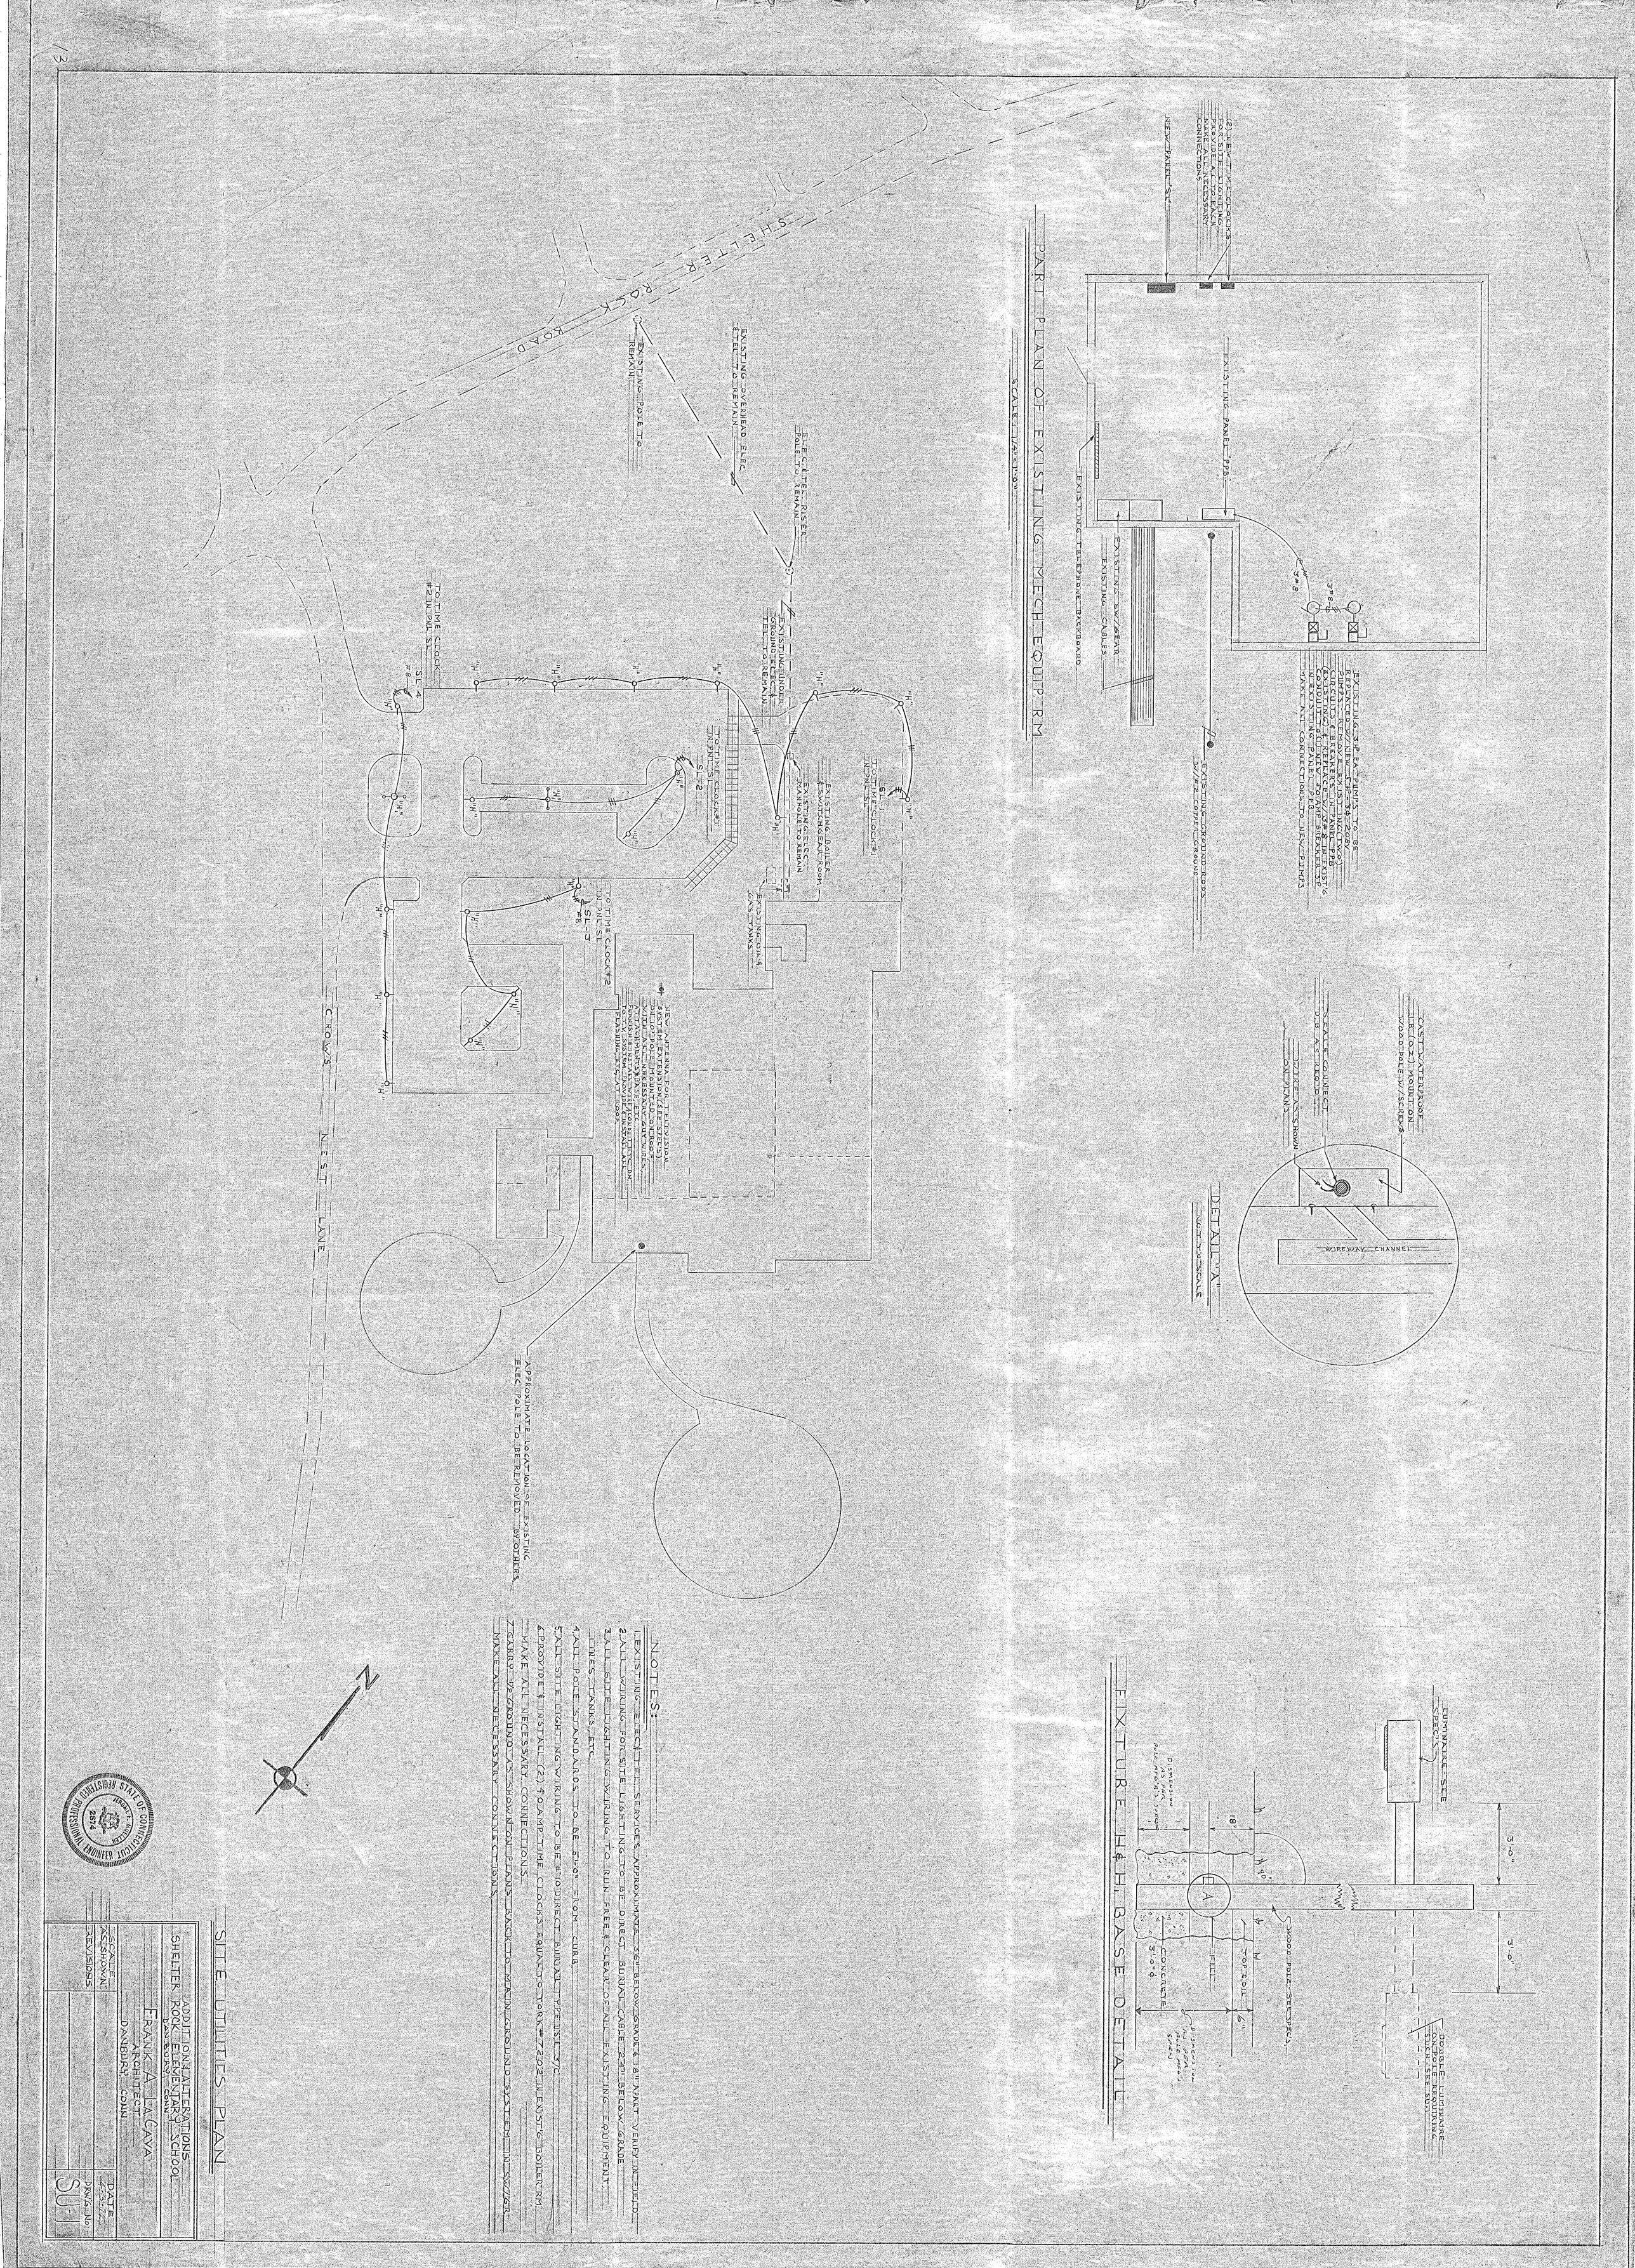


## NOTES:

1. EXISTING ELECT. & TEL. SERVICES, APPROXIMATE. 36" BELOW GRADE & 18" APART - VERIFY IN FIELD.
2. ALL WIRING FOR SITE LIGHTING TO BE DIRECT BURIAL CABLE 24" BELOW GRADE.
3. ALL SITE LIGHTING WIRING TO RUN FREE & CLEAR OF ALL EXISTING EQUIPMENT, LINES, TANKS, ETC.
4. ALL POLE STANDARDS TO BE 5'-0" FROM CURB.
5. ALL SITE LIGHTING WIRING TO BE #10 DIRECT BURIAL TYPE USE, 3/C.
6. PROVIDE & INSTALL (2) 4 OAMP TIME CLOCKS EQUAL TO Tork #7202 IN EXISTING BOILER RM.
7. MAKE ALL NECESSARY CONNECTIONS.
8. CARRY 3/2 GROUND AS SHOWN ON PLANS BACK TO MAIN GROUND SYSTEM IN SWGR.
9. MAKE ALL NECESSARY CONNECTIONS.

## SITE UTILITIES PLAN

ADDITION & ALTERATIONS
SHELTER ROCK ELEMENTARY SCHOOL
DANBURY, CONN.

FRANK A. LA CAVA
ARCHITECT
DANBURY, CONN.

SCALE: AS SHOWN
REVISIONS

DATE: 7-25-72
DRWG. NO. SU-1

STATE OF CONNECTICUT REGISTERED PROFESSIONAL ENGINEER TERENCE F. MCGEEVER 2874